



FTL-F UNITS

72, 96, & 200 Piloted Units

The FTL-F Series ignition unit is engineered for continuous pilot operation in flare applications. By utilizing flame front generation technology, critical ignition components are relocated away from the extreme flare environment, significantly enhancing system reliability and service life.


Features

- Piloted
- Services Piloted Flares
- Gas Inlet: 1/4-Inch NPT
- Pilot Length Variations: 5 ft, 7 ft, and 17 ft
- Flame Sensing with Thermocouple



The SureFire Difference:

- ✓ Eliminates spark ignition systems
- ✓ Elimination of manual ignition
- ✓ Reduced maintenance requirements
- ✓ Patented system design
- ✓ No ignition coil required
- ✓ Flame front generation technology

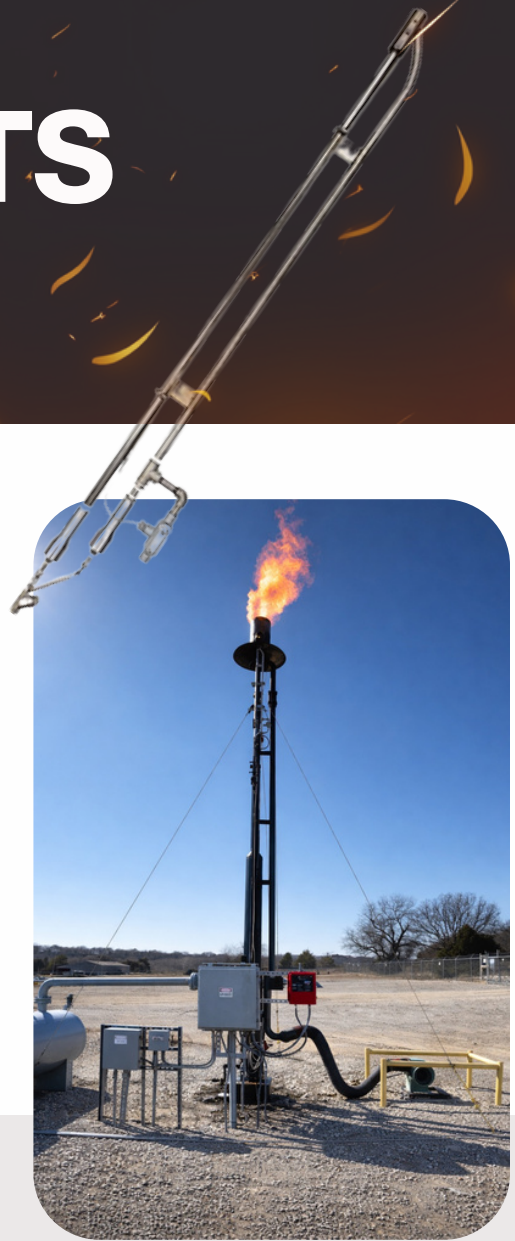

APPLICATIONS

Flare